

Iso-Flex[®] VS Series

8"-10" Wall & Ceiling Expansion Joint

PRODUCT DESCRIPTION

The Iso-Flex VS 8" to 10" expansion joint cover incorporates an anchored aluminum extrusion, guide bars and elastomeric seal profiles. The system has been designed to handle common wall and ceiling expansion joint conditions. The elastomeric seals can be designed in tandem in order to handle larger movements.

BASIC USES

Iso-Flex VS expansion joint cover is a standard wall and ceiling system that is appropriate for use in interior and exterior building environments.

ADVANTAGES

- Elastomeric seals are available in Santoprene or silicone materials.
- The system is adaptable for larger gaps and movements.
- The system can be fire rated.

LIMITATIONS

- Performance of the Iso-Flex VS Series expansion joint cover is closely tied to preparation and installation techniques as well as structural behavior of the expansion joint gap. Maintaining close tolerances is essential to the success of the expansion joint cover. Correct installation of this system is critical and should be performed only by an authorized applicator of products manufactured by LymTal International, Inc.

STANDARD COLORS

Elastomeric seals available in standard black, white, gray and beige. Custom colors available.

INSTALLATION

Preliminary: Blockouts to receive the Iso-Flex VS expansion joint cover must be clean, dry, sound, relatively smooth and free of voids, ridges, and sharp projections. Joint openings and blockouts must be properly sized.

Installation: Holding a standard aluminum anchor member in place, drill anchor holes into the metal wall studs or concrete substrate. Once the anchor holes are drilled install the anchor screws.

Install guide bars by sliding into anchor extrusions. The elastomeric seal can then be pressed into place, first into the guide bar and then into the anchor extrusions.


PRECAUTIONS

Refer to Material Safety Data Sheet for detailed health and safety information prior to use.

WARRANTY

LymTal warrants that its products are manufactured free of defects and conform to the technical data listed. Under this warranty we will replace, at no charge, any material proven defective when applied in accordance with our written instructions for applications recommended by us as suitable for subject product. LymTal shall not be liable for any injury, loss or damage, direct or consequential, arising out of the use of the product.

NOTE:
 1. Santoprene colors available:
 Black, White, Gray or Tan.

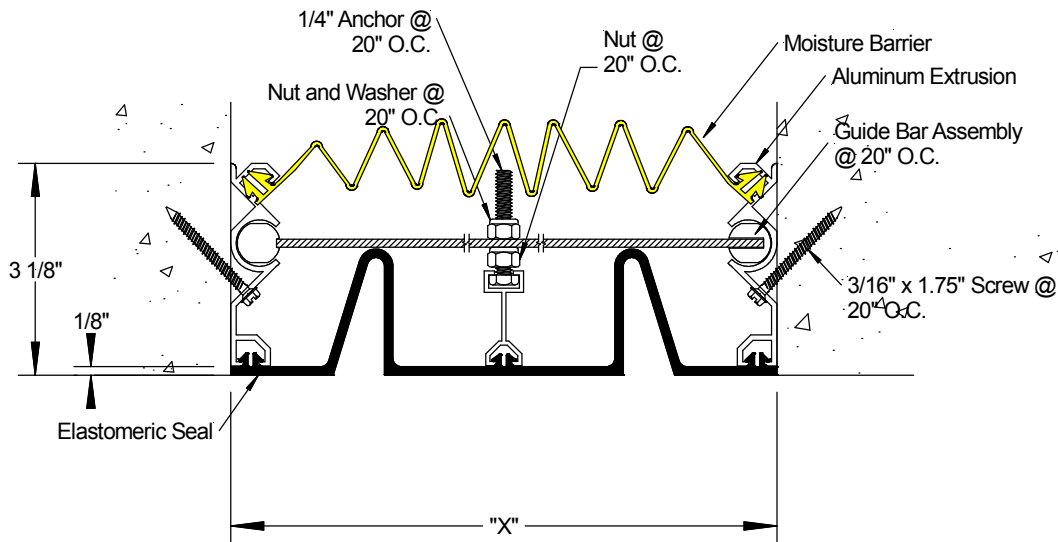

SYSTEM TYPE	JOINT OPENING (X)	THERMAL MVMT.
		+/-
VS80	8.000 203.201	50%
VS90	9.000 228.601	50%
VS100	10.000 254.001	50%

NOTE:

1. All extruded aluminum members shall be 6063-T5 alloy.
2. System anchorage shall be 3/16" diameter @ 20" O.C.
3. Guide bar assemblies shall be located at 20" O.C.

Revised 12/08

LymTal International, Inc.

4150 South Lapeer Road • Lake Orion, MI 48359 • Tel (248) 373-8100 • Fax (248) 373-3480 • www.lymtal.com